

# **70-80 TON SERIES**



519 539 8567 • 925 Devonshire Ave • Woodstock, Ontario

www.scheltematrailer.com | @scheltema.trailer | sales@scheltematrailer.com

Call us with your trailer inquiries. We are a recognized leader in building custom-designed, special, high capacity trailers.

# **STANDARD 70-80 TON**

#### **GOOSENECK**

- Hydraulic detachable cantilever
- Hydraulic Stinger
- Wet Line operation
- Single king pin location
- 51" Fifth Wheel height
- Air operated column/deck locking pin
- Air operated deck locking pin

#### DECK

- 24'x 8'- 6" Level Deck
- 2.5" Solid Oak floor on outside
- Expanded Metal in center
- Approach Ramps come with grosser bars
- Extension Brackets 12" swinging type
- Flag holders
- Lashing rings


#### **REAR BRIDGE**

- Fixed with low boom trough
- Open style bolsters
- 55" Axle spreads
- Truck-Lite LED system
- Flag holders
- Tires: 275/70R 22.5
- Wheels: 22.5 x 8.25, Steel wheels
- Brakes: Drum
- Axle: 25,000 lbs. capacity each
- Suspension: Hendrickson Turner or Ridewell, 25,000 lbs. capacity

#### **FINISH**

• Sandblasted, epoxy primed and painted.



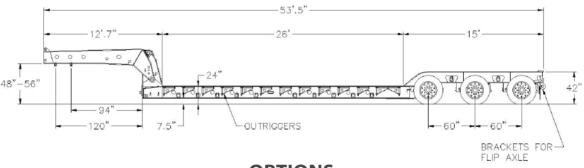

# **OPTIONS**

## **GOOSENECK**

- Various King Pin Heights (48"-54")
- Single/Double Pin Variations (94"-120")
- Wet Line/Power Pack or both
- Swing out Lugs
- Bolt on Fenders or Weld on Fenders
- Extension Lugs
- Gooseneck Extension
- Column/Deck Lock: Air or Hydraulic
- Column: Lights, Chain Bar and Doors

### **DECK**

• Type: Level, Drop Side

Width: 8'6-10'Length: 24'-28'

• Ramps: Low, Level, Level with Extension

• Deck Center: Open with Mesh or Wood

• Deck Tool Boxes: 1-2

Boom Plate: 2-4 Cross MembersD-Rings: Flat, Bent or Stake Pocket

• Deck Inserts: 5ft, 10ft

## **REAR BRIDGE**

• Axle Sprea: 55"-75"

• Axle Configuration: 2,3 or 4 axles

• Width: 8'6-10'

Axle Lift

• Connection: Fixed or Removable

• **Lighting:** Strobe (On/Off Switch, Battery)

• Pin On: Shim able or Flip Lugs

• D-Sign/D-Sign Brackets

• Override Right Height Control